

FM-L Field Microscope

Oblique Illumination Handheld Optical Microscope for Fiber Inspection



Key Features

- Rugged, ergonomic design for field use
- LED illumination for 100,000+ hour life
- Oblique illumination for superior view of fiber end face cleanliness and core condition
- Integrated laser safety filter

FM-L Field Microscope

The FM-L-series microscopes use **oblique illumination** to provide users with a clear view of surface debris and core condition. It is available in 100, 160, and 200X magnification models that use energy-efficient light emitting diode (LED) illumination to provide 100,000+ hours of lamp life. The rubber boot provides a slip-resistant grip; while the built-in laser safety filter provides a high level of attenuation at the most common wavelengths for accidental viewing of live fiber. Its durability, ergonomic design, optical performance, and ease-of-use make it the optical instrument of choice for viewing fiber terminations in sensitive installations.


FM-L microscopes use FMA-series adapters that let users inspect various connector types

Applications

- Inspect patch cord (male) side of fiber interconnect
- Inspect various connector types with a wide selection of interchangeable adapters

Oblique Illumination

Oblique illumination causes the light from the white LED to hit the fiber end face at an angle, making the core clearly visible, providing users with an easy and ready view of surface debris or contamination. It limits the scratches seen on the ferrule, allowing technicians to polish to a low loss level and to avoid over-polishing.

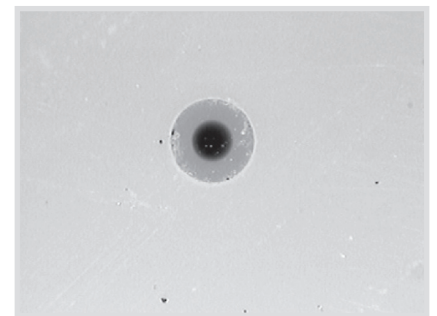

FMA Adapters

FMA-U12

 Inspects Universal
1.25 mm patch cords

FMA-U25

 Inspects Universal
2.5 mm patch cords

FMA-MTP

 Inspects MTP®
(multi-fiber) patch cords

For a complete list of FMA adapters, go to
www.westoverfiber.com.

Laser Safety

JDSU fiber microscopes include a laser safety feature to help prevent damage to the eye if a user accidentally views live fiber. Under no circumstances should a user purposely view live fiber with any optical microscope, as it poses significant risk of damage to the eye.



FM-C Specifications

Dimensions	24.0 x 5.5 x 3.7 cm (9.4 x 2.2 x 1.5 in)
Weight	0.45 kg (1.0 lbs)
100X Magnification field-of-view (FOV)	1050 µm
160X Magnification FOV	1050 µm
200X Magnification FOV	950 µm
Infrared (IR) attenuation filter	Built-in
Power source	Three AAA alkaline batteries
LED life	100,000 hours
Warranty	1 yr

Ordering Information

FM-L100	100X oblique illumination field microscope; 2.5 mm FMA adapter
FM-L160	160X oblique illumination field microscope; 2.5 mm FMA adapter
FM-L200	200X oblique illumination field microscope; 2.5 mm FMA adapter
FM-LX100	100X oblique illumination field microscope
FM-LX160	160X oblique illumination field microscope
FM-LX200	200X oblique illumination field microscope

Test & Measurement Regional Sales

NORTH AMERICA TOLL FREE: 1 866 228 3762 FAX: +1 301 353 9216	LATIN AMERICA TEL: +1 954 688 5660 FAX: +1 954 345 4668	ASIA PACIFIC TEL: +852 2892 0990 FAX: +852 2892 0770	EMEA TEL: +49 7121 86 2222 FAX: +49 7121 86 1222	www.jdsu.com/inspect
---	--	---	---	--